




LL7084 LED 80W, 96W, 112W, 120W Selectable

Applications

High efficacy floodlights in stylish round housing with options of selectable wattage and selectable CCT to reduce stock SKUs. Dynamic blend of RGB-CW 2700K-6500K ideally suited for architectural applications demanding sophisticated colour variations. Multiple mounting mechanisms facilitating installation on hard surfaces, lawns and poles.

Dimensions

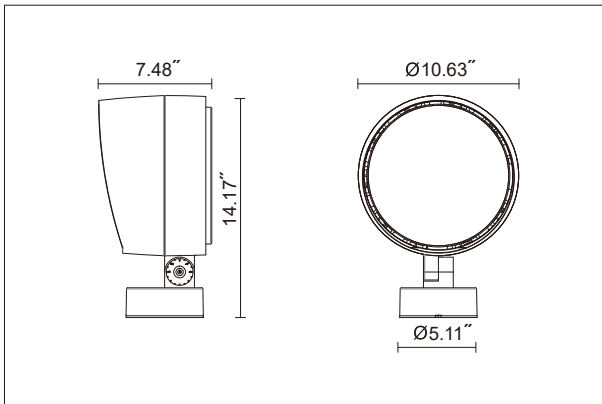

Specifications

Housing	Die-cast aluminum
Gasket	Silicone rubber
Front Cover	Tempered Glass
LED Optic	Polycarbonate Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	120-277V/AC
Ambient Temperature	-40°C~45°C
Ingress Protection	IP66

Certifications




Options and Accessories

Housing Color



Glareshield



Mounting

See p. 21

Ordering Guide:

Example: **ET7084 - C120 - 4 - 15 - J - B - S**

1 Series	2 Power Luminaire Output	3 CCT	4 Beam Angle	5 Mounting	6 Housing Color	7 Accessory
ET7084	C120: COB 120W ≤10311lm@3K	27: 2700K 3: 3000K 4: 4000K 5: 5000K	5: 5° 15: 15° 25: 25° 36: 36° 50: 50°	J: Junction box KR: Knuckle with 1/2" threaded receptacle KS: Knuckle with 1/2" threaded stem Y: Yoke	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	H: Honeycomb louver C: Concentric louver M: Marine ambient corrosion resistance PC: Pole clamp for one or two fixtures DMG: 0-10V Dimming except ET7084-R112 MT: Mounting plate for standard junction box RS: Retractable stem FV: Full visor
ET7084 (Selectable)	WS: COB 80W ≤7040lm@4K COB 96W ≤8448lm@4K COB 112W ≤10560lm@4K	CCTS: 2700K 4000K 5700K	15: 15° 25: 25° 36: 36° 50: 50°			
R112: LED 112W ≤2862lm@3K		RGBW3: RGBW 3000K RGBW4: RGBW 4000K RGBW5: RGBW 5000K RGBCW: RGBCW 2700K-6500K	8: 8° Except RGBCW 15: 15° 25: 25° 40: 40° 60: 60° 1530: 30°x15°			