




LL7307 LED 36W, ET7308 LED 48W

Applications

COB LED floodlights with two styles of gear boxes, multiple beam angle options and glare shields for mounting on ground, walls and lawns in commercial and residential applications of accent lighting, façade lighting and landscape lighting.

Dimensions

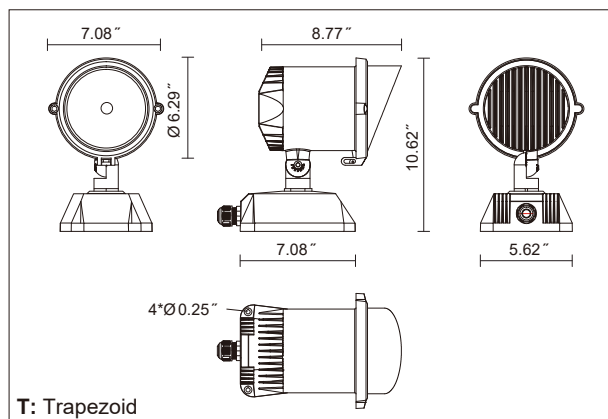

Specifications

Housing	Die-cast aluminum
Gasket	Silicone rubber
Front Cover	Tempered Glass
Reflector	Anodized aluminum 1090
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	100~240V/AC
Ambient Temperature	-20°C~45°C
Ingress Protection	IP65

Certifications



Options and Accessories

Visor



No visor



Upper visor



Full visor

Housing Color



Black RAL9011



White RAL9016



Gray RAL7012



Mineral bronze



Silver RAL9006

Mounting



Round Gear Box



Trapezoid Gear Box



Ground Stake



Tree strap

Installation



Ground Mounted (Standard)



Wall Mounted (Standard)

Glareshield



Honeycomb Louver

Ordering Guide:

Example: **ET7307 C36 - 4 - 30 - UV - R - B - S - P**

1 Series Power Luminaire Output	2 CCT	3 Beam Angle	4 Visor	5 Gear Box	6 Housing Color	7 Accessory
ET7307 C36: COB 36W ≤2511lm@3K	27: 2700K 3: 3000K	15: 15° 30: 30°	NV: No visor UV: Upper visor	R: Round T: Trapezoid	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	S: Ground Stake P: Tree strap MT: Mounting plate for standard junction box H: Honeycomb Louver M: Marine ambient corrosion resistance DMG: 0-10V Dimming
ET7308 C48: COB 48W ≤3388lm@3K	4: 4000K 5: 5000K	45: 45° 3618: H36°xV18°	FV: Full visor			