




LL7305 LED 20W, ET7306 LED 27W

Applications

COB LED floodlights with two styles of gear boxes, multiple beam angle options and glare shields for mounting on ground, walls and lawns in commercial and residential applications of accent lighting, façade lighting and landscape lighting.


Dimensions

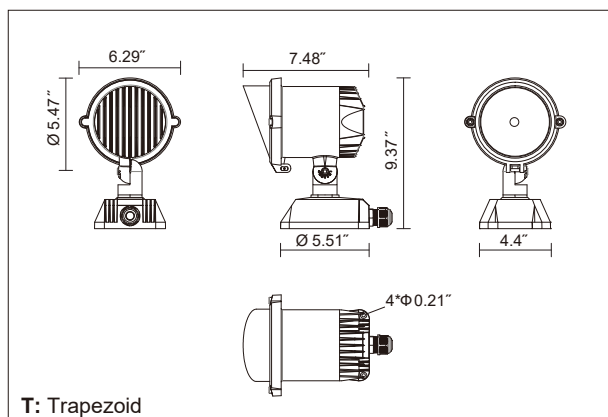

Specifications

Housing	Die-cast aluminum
Gasket	Silicone rubber
Front Cover	Tempered Glass
Reflector	Anodized aluminum 1090
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	120~277V/AC
Ambient Temperature	-20°C~45°C
Ingress Protection	IP65

Certifications

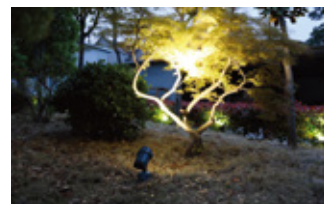

Options and Accessories

Visor




Housing Color




Mounting



Installation



Glareshield



Ordering Guide:

Example: **ET7305 C20 - 4 - 30 - CV - T - B - S**

1 Series Power Luminaire Output	2 CCT	3 Beam Angle	4 Visor	5 Gear Box	6 Housing Color	7 Accessory
ET7305 C20: COB 20W ≤1480lm@3K	27: 2700K 3: 3000K	15: 15° 30: 30° 45: 45°	NV: No visor UV: Upper visor FV: Full visor	R: Round T: Trapezoid	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	S: Ground Stake P: Tree strap H: Honeycomb Louver MT: Mounting plate for standard junction box M: Marine ambient corrosion resistance DMG: 0-10V Dimming
ET7306 C27: COB 27W ≤2053lm@3K	4: 4000K 5: 5000K	3015: H30°xV15°				