




LL8019 LED 22W

Applications

Ingrade uplight with COB white light and reflector, multiple beam angle choices including asymmetric spread, and adjustable aiming by manually tilting up to $\pm 15^\circ$. Optional dimming. Ideally suited for burial installations in concrete and lawns for grazing walls and columns, highlighting art objects such as sculptures and lighting up trees and bushes.

Dimensions

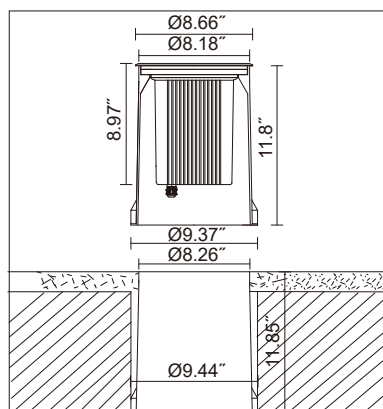

Ordering Guide:

Example: **ET8019 - C22 - 3 - 15 - S4 - H**

1 Series	2 Power Luminaire Output	3 CCT	4 Beam Angle	5 Bezel	6 Accessory
ET8019	C22: COB 22W $\leq 2087\text{lm}@3\text{K}$	27: 2700K 3: 3000K 4: 4000K 5: 5000K	15: 15° 24: 24° 36: 36° 4520: H45° xV20°	S4: 304 Stainless steel S6: 316 Stainless steel	H: Honeycomb Louver M: Marine ambient corrosion resistance DMG: 0-10V Dimming C: Concentric Louver SRL: Slip-resistant lens

Specifications

Housing	Die-cast aluminum
Gasket	Silicone rubber
Top Cover	Clear Tempered Glass
Reflector	Anodized aluminum
Bezel	Stainless steel
Driver Type	Constant current
LED CRI	80
Input Voltage	120~277V/AC
Ambient Temperature	$-20^\circ\text{C} \sim 45^\circ\text{C}$
Adjustable Aiming	Manual tilting $\pm 15^\circ$, Horizontal rotation 360°


Certifications



Ingress Protection



Photometric Data

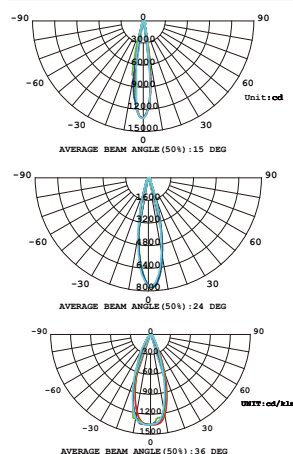

Accessories




Honeycomb Louver



Concentric Louver

Adjustable Aiming



Manual tilting $\pm 15^\circ$
(Standard)