




LL8126 LED 36W, 44W

Applications

Ingrade uplight with COB white light and reflector, multiple beam angle choices including asymmetric spread, and adjustable aiming by manually tilting up to $\pm 15^\circ$. Optional dimming. Ideally suited for burial installations in concrete and lawns for grazing walls and columns, highlighting art objects such as sculptures and lighting up trees and bushes.

Dimensions

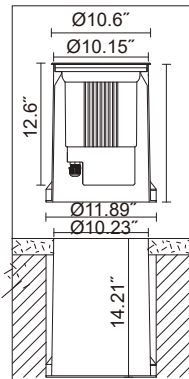

Ordering Guide:

Example: ET8126 - C44 - 3 - 08 - S4 - H

1 Series	2 Power Luminaire Output	3 CCT	4 Beam Angle	5 Bezel	6 Accessory
ET8126	C36: COB 36W $\leq 3102\text{lm}@3\text{K}$ C44: COB 44W $\leq 3658\text{lm}@3\text{K}$	27: 2700K 3: 3000K 4: 4000K 5: 5000K	08: 8° 18: 18° 36: 36° 72: 72° 3010: H30°xV10°	S4: 304 Stainless steel S6: 316 Stainless steel	H: Honeycomb Louver M: Marine ambient corrosion resistance DMG: 0-10V Dimming C: Concentric Louver SRL: Slip-resistant lens

Specifications

Housing	Die-cast aluminum
Gasket	Silicone rubber
Top Cover	Clear Tempered Glass
Reflector	Polycarbonate
Bezel	Stainless steel
Driver Type	Constant current
LED CRI	80
Input Voltage	120~277V/AC
Ambient Temperature	$-40^\circ\text{C} \sim 45^\circ\text{C}$
Adjustable Aiming	Manual tilting $\pm 15^\circ$, Horizontal rotation 360°


Certifications



Ingress Protection



Photometric Data

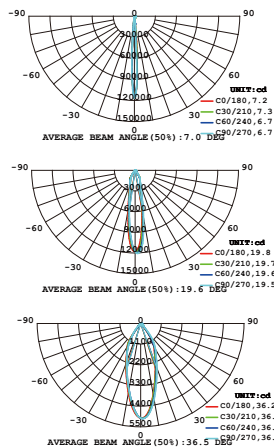

Accessories




Honeycomb Louver



Concentric Louver

Adjustable Aiming



Manual tilting $\pm 15^\circ$
(Standard)