




LL6875 LED 18W, 23W, 28W Selectable

Applications

Contemporary style wall pack in an angular, compact housing. Types III and IV distributions with full cutoff ideally suited for architectural applications. Selectable wattage helps reduce inventory and accelerate delivery.

Dimensions

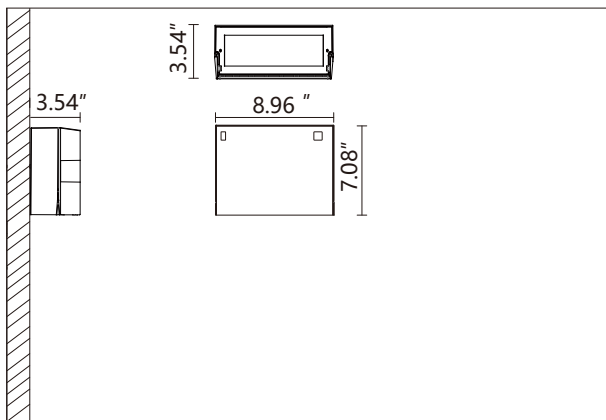


Specifications

Housing	Die-cast aluminum
Bottom Cover	Tempered Glass
Gasket	Silicone rubber
LED Optic	Polycarbonate Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	120~277V/AC
Ambient Temperature	-20°C~45°C
Light Aperture	Asymmetric
Ingress Protection	IP65

Certifications



Photometric Data

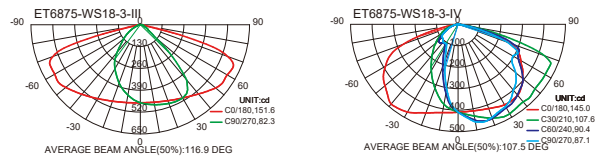

Ordering Guide:

Example: **ET6875 - WS - 4 - IV - B - M**

1 Series	2 Power Luminaire Output	3 CCT	4 Beam Pattern	5 Housing Colour	6 Accessory
ET6875	WS: LED 18W ≤1558lm@3K LED 23W ≤2141lm@3K LED 28W ≤2501lm@3K	3: 3000K 4: 4000K 5: 5000K	III: Type III-S IV: Type IV-S	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance DMG: 0-10V Dimming EM: Emergency battery backup PH: Photocell