



LL6150 LED 20W, 40W

Applications

Square wall sconces, aimed either up or down, with multiple beam angle choices, to graze columns or to create light level contrast on wall façade. Choices of housing colour allow the luminaire to blend perfectly with exterior architectural colours under daylight.


Specifications

Housing and Side Arm	Extruded aluminum
Cover	Die-cast aluminum
Gasket	Silicone rubber
Cover Lens	Tempered Glass
LED Optic	PMMA Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	100~277V/AC
Ambient Temperature	-40°C~45°C
Ingress Protection	IP65


Certifications




Dimensions

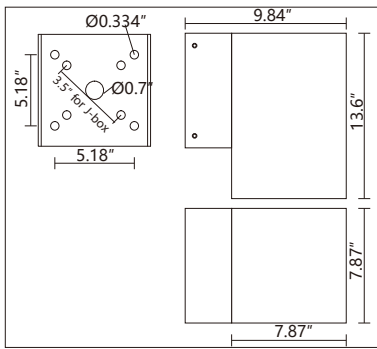


Photometric Data



Ø(m)	h(m)	E(lx) 6000k	E(lx) 3000k
1.87	6	126	111
1.25	4	284	250
0.93	3	505	443
0.62	2	1135	999
0.31	1	4536	3993



Downlight Only



Uplight Only

Ordering Guide:

Example: **ET6150 - C20 - 3 - 15 - G - T**

1 Series	2 Power Luminaire Output	3 CCT	4 Beam Angle	5 Housing Colour	6 Accessory
ET6150	C20: COB 20W ≤1829lm@3K	27: 2700K 3: 3000K 4: 4000K 5: 5000K	15: 15° 24: 24° 36: 36° 50: 50°	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance DMG: 0-10V Dimming T: 20° tilt to wall RPH: Remote photocell

ET6150	C40: COB 40W ≤3658lm@3K	27: 2700K 3: 3000K 4: 4000K 5: 5000K	15: 15° 24: 24° 36: 36° 50: 50°	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance T: 20° tilt to wall DMG: 0-10V Dimming RPH: Remote photocell
---------------	-----------------------------------	---	--	--	--