




LL6161 LED 20W, 20Wx2 40W, 40Wx2

Applications

Square wall sconces, with both uplight and downlight, or either uplight or downlight, and multiple beam angle choices, to graze columns or to create light level contrast on wall façade. Choices of housing colour allow the luminaire to blend perfectly with exterior architectural colours under daylight.

Dimensions

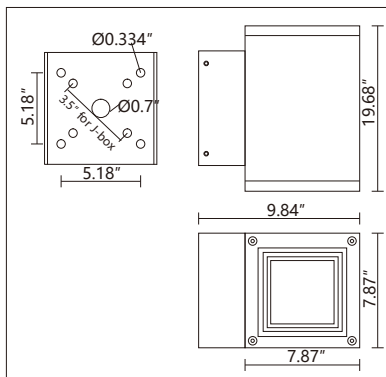



Specifications

Housing and Side Arm	Extruded aluminum
Cover	Die-cast aluminum
Gasket	Silicone rubber
Cover Lens	Tempered Glass
LED Optic	PMMA Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	100~277V/AC
Ambient Temperature	-40°C~45°C
Ingress Protection	IP65

Certifications



Photometric Data

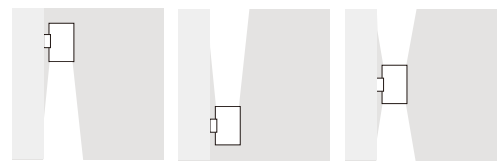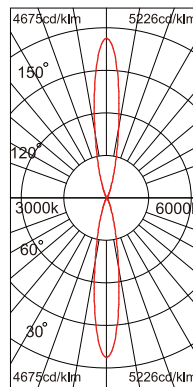

Downlight Only Uplight Only Uplight and Downlight

Ø(m)	h(m)	E(lx) 6000k	E(lx) 3000k
1.87	6	126	111
1.25	4	284	250
0.93	3	505	443
0.62	2	1135	999
0.31	1	4536	3993

Ordering Guide:

Example: **ET6161 - C40 - 3 - 15 - G - T**

1 Series	2 Power Luminaire Output	3 CCT	4 Beam Angle	5 Housing Colour	6 Accessory
ET6161	C20x2: COB 20Wx2 ≤3658lm@3K C20: COB 20W ≤1829lm@3K	27: 2700K 3: 3000K 4: 4000K 5: 5000K	15: 15° 24: 24° 36: 36° 50: 50° 1560: UP15°×Down60°	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance DMG: 0-10V Dimming T: 20° tilt to wall SDMG: Up and down separate dimming RPH: Remote photocell
ET6161	C40x2: COB 40Wx2 ≤3658lm@3K C40: COB 40W ≤7316lm@3K	27: 2700K 3: 3000K 4: 4000K 5: 5000K	15: 15° 24: 24° 36: 36° 50: 50° 1550: UP15°×Down50°	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance T: 20° tilt to wall SDMG: Up and down separate dimming DMG: 0-10V Dimming RPH: Remote photocell