




LL6005 LED 4W

Applications

Round wall sconces, aimed either up or down, with multiple beam angle choices, to graze columns or to create light level contrast on wall façade. Choices of housing colour allow the luminaire to blend perfectly with exterior architectural colours under daylight.

Dimensions

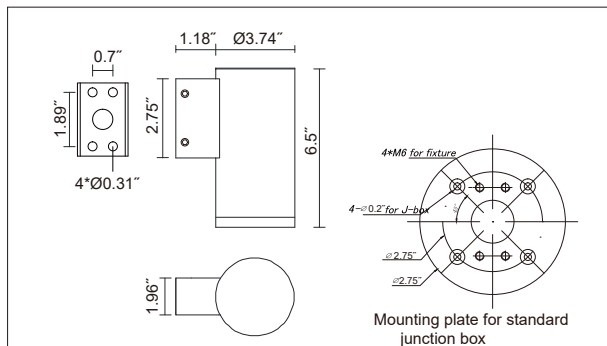

Specifications


Housing	Extruded aluminum
Cover and Side Arm	Die-cast aluminum
Gasket	Silicone rubber
Cover Lens	Tempered Glass
LED Optic	PMMA Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	100~277V/AC
Ambient Temperature	-40°C~45°C
Ingress Protection	IP65

Certifications



Not ETL listed for RGB

Photometric Data



Ø(m)	h(m)	E(lx) 6000k	E(lx) 3000k
1.86	6	22	17
1.24	4	48	39
0.93	3	86	69
0.62	2	192	154
0.31	1	769	600

Downlight Only

Uplight Only

Ordering Guide:

Example: **ET6005 - C4 - 3 - 25 - G - T**

1 Series	2 Power Luminaire Output	3 CCT	4 Beam Angle	5 Housing Colour	6 Accessory
ET6005	C4:LED 4W ≤226lm@3K	27: 2700K 3: 3000K 4: 4000K	10: 10° 25: 25° 45: 45° 60: 60°	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	T: 20° tilt to wall M: Marine ambient corrosion resistance MT: Mounting plate for standard junction box RPH: Remote photocell