




LL6009 LED 4W, 4Wx2

Applications

Round wall sconces, with both uplight and downlight, or either uplight or downlight, and multiple beam angle choices, to graze columns or to create light level contrast on wall façade. Asymmetric up/down beam angles create patterns of enhanced visual interest. Choices of housing colour allow the luminaire to blend perfectly with exterior architectural colours under daylight.

Dimensions

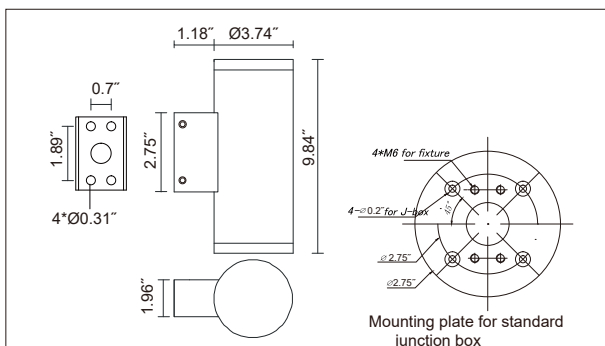

Specifications



Housing	Extruded aluminum
Cover and Side Arm	Die-cast aluminum
Gasket	Silicone rubber
Cover Lens	Tempered Glass
LED Optic	PMMA Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	100~277V/AC
Ambient Temperature	-40°C~45°C
Ingress Protection	IP65

Certifications



Not ETL listed for RGB

Photometric Data

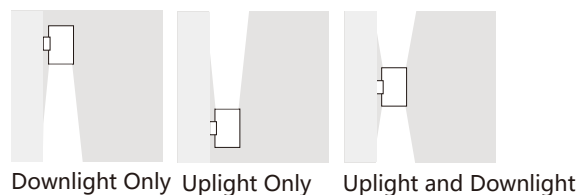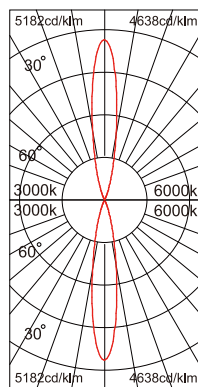

Ø(m)	h(m)	E(lx) 6000k	E(lx) 3000k
1.86	6	22	17
1.24	4	48	39
0.93	3	86	69
0.62	2	192	154
0.31	1	769	600

Ordering Guide:

Example: ET6009 - C4x2 - 3 - 25 - G - T

1 Series	2 Power Luminaire Output	3 CCT	4 Beam Angle	5 Housing Colour	6 Accessory
ET6009	C4x2: LED 4Wx2 ≤452lm@3K C4: LED 4W ≤226lm@3K	27: 2700K 3: 3000K 4: 4000K	10: 10° 25: 25° 45: 45° 60: 60° 1060: UP10°XDown60°	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	T: 20° tilt to wall M: Marine ambient corrosion resistance MT: Mounting plate for standard junction box RPH: Remote photocell