



Specifications

Housing	Extruded aluminum
Cover and Side Arm	Die-cast aluminum
Gasket	Silicone rubber
Cover Lens	Tempered Glass
LED Optic	PMMA Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	100~277V/AC
Ambient Temperature	-40°C~45°C
Ingress Protection	IP65

Certifications




Not ETL listed for RGB

LL6015 LED 11W, 30W


Applications

Round wall sconces, aimed either up or down, with multiple beam angle choices, to graze columns or to create light level contrast on wall façade. Choices of housing colour allow the luminaire to blend perfectly with exterior architectural colours under daylight.


Dimensions

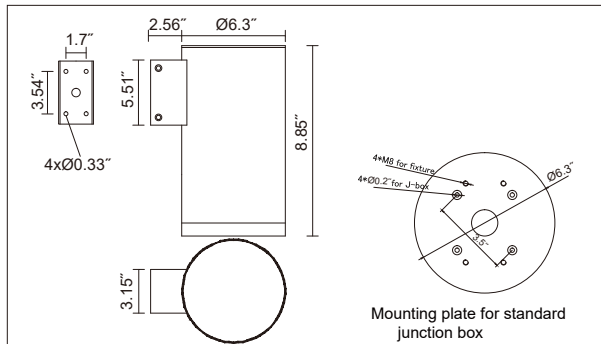


Photometric Data



Ø(m)	h(m)	E(lx) 6000k	E(lx) 3000k
1.88	± 6	69	48
1.25	± 4	155	107
0.93	± 3	276	190
0.62	± 2	620	428
0.32	± 1	2478	1709



Downlight Only



Uplight Only

Ordering Guide:

Example: ¹ET²6015 - ³C11- ⁴3 - ⁵25 - ⁶G - T

1 Series- LED Type	2 Power Luminaire Output	3 CCT	4 Beam Angle	5 Housing Colour	6 Accessory
ET6015 : High Power	C11 : LED 11W ≤601lm@3K	27 : 2700K 3 : 3000K 4 : 4000K	10 : 10° 25 : 25° 45 : 45° 60 : 60°	B : Black RAL9011 W : White RAL9016 G : Gray RAL7012 Z : Mineral bronze S : Silver RAL9006	T : 20° tilt to wall M : Marine ambient corrosion resistance DMG : 0-10V Dimming MT : Mounting plate for standard junction box RPH : Remote photocell
ET6015 : COB LED	C30 : COB 30W ≤2437lm@3K	27 : 2700K 3 : 3000K 4 : 4000K 5 : 5000K	15 : 15° 24 : 24° 36 : 36° 50 : 50°	B : Black RAL9011 W : White RAL9016 G : Gray RAL7012 Z : Mineral bronze S : Silver RAL9006	T : 20° tilt to wall M : Marine ambient corrosion resistance DMG : 0-10V Dimming MT : Mounting plate for standard junction box RPH : Remote photocell