




LL6018 LED 11W 11Wx2 30W 30Wx2

Applications

Round wall sconces, with both uplight and downlight, or either uplight or downlight, and multiple beam angle choices, to graze columns or to create light level contrast on wall façade. Asymmetric up/down beam angles create patterns of enhanced visual interest. Choices of housing colour allow the luminaire to blend perfectly with exterior architectural colours under daylight.

Dimensions

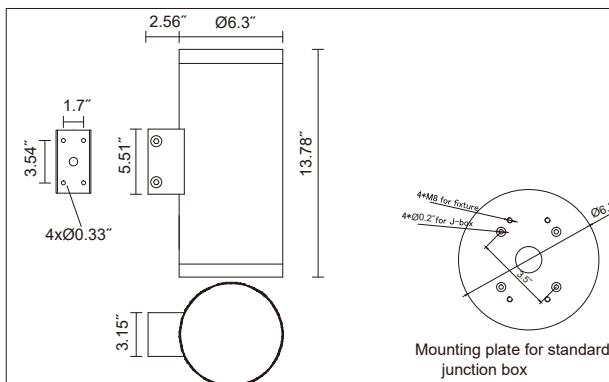

Specifications



Housing	Extruded aluminum
Cover and Side Arm	Die-cast aluminum
Gasket	Silicone rubber
Cover Lens	Tempered Glass
LED Optic	PMMA Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	100~277V/AC
Ambient Temperature	-40°C~45°C
Ingress Protection	IP65

Certifications



Not ETL listed for RGB

Photometric Data

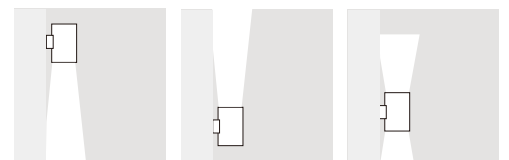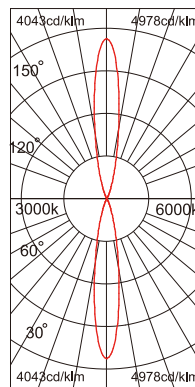

Downlight Only Uplight Only Uplight and Downlight

Ø(m)	h(m)	E(lx) 6000k	E(lx) 3000k
1.88	6	69	48
1.25	4	155	107
0.93	3	276	190
0.62	2	620	428
0.32	1	2478	1709

Ordering Guide:

Example: **ET6018 - C11x2 - 3 - 25 - G - T**

1 Series- LED Type	2 Power Luminaire Output	3 CCT	4 Beam Angle	5 Housing Colour	6 Accessory
ET6018: High Power	C11x2: LED 11Wx2 ≤1202lm@3K C11: LED 11W ≤601lm@3K	27: 2700K 3: 3000K 4: 4000K	10: 10° 25: 25° 45: 45° 60: 60° 0560: UP5°XDown60°	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	T: 20° tilt to wall M: Marine ambient corrosion resistance DMG: 0-10V Dimming MT: Mounting plate for standard junction box SDMG: Up and down separate dimming RPH: Remote photocell
ET6018: COB LED	C30x2: COB 30Wx2 ≤4556lm@3K C30: COB 30W ≤2437lm@3K	27: 2700K 3: 3000K 4: 4000K 5: 5000K	15: 15° 24: 24° 36: 36° 50: 50° 1560: UP15°XDown50°	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	T: 20° tilt to wall M: Marine ambient corrosion resistance DMG: 0-10V Dimming MT: Mounting plate for standard junction box SDMG: Up and down separate dimming RPH: Remote photocell