




LL6119 LED 4W, 4Wx2 15W, 15Wx2

Applications

Square wall sconces, with both uplight and downlight, or either uplight or downlight, and multiple beam angle choices, to graze columns or to create light level contrast on wall façade. Choices of housing colour allow the luminaire to blend perfectly with exterior architectural colours under daylight.

Dimensions

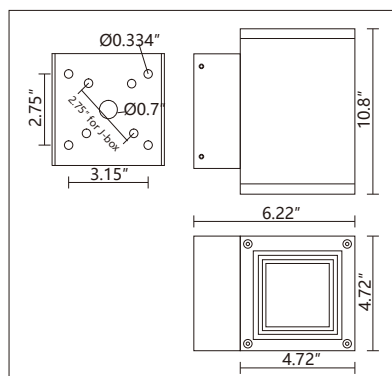



Specifications

Housing and Side Arm	Extruded aluminum
Cover	Die-cast aluminum
Gasket	Silicone rubber
Cover Lens	Tempered Glass
LED Optic	PMMA Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	100~277V/AC
Ambient Temperature	-40°C~45°C
Ingress Protection	IP65

Certifications



Photometric Data

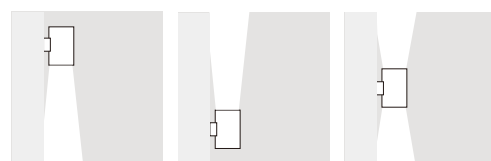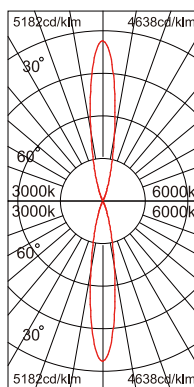

Downlight Only Uplight Only Uplight and Downlight

Ø(m)	h(m)	E(lx) 6000k	E(lx) 3000k
1.86	6	22	17
1.24	4	48	39
0.93	3	86	69
0.62	2	192	154
0.31	1	769	600

Ordering Guide:

Example: ¹ET6119 - ²C4 - ³3 - ⁴15 - ⁵G - ⁶T

¹ Series	² Power Luminaire Output	³ CCT	⁴ Beam Angle	⁵ Housing Colour	⁶ Accessory
ET6119	C4x2: COB 4Wx2 ≤664lm@3K C4: COB 4W ≤332lm@3K	27: 2700K 3: 3000K 4: 4000K 5: 5000K	15: 15° 24: 24° 36: 36° 50: 50° 1560: UP15°XDown50°	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance T: 20° tilt to wall RPH: Remote photocell
ET6119	C15x2: COB 15Wx2 ≤2096lm@3K C15: COB 15W ≤1048lm@3K	27: 2700K 3: 3000K 4: 4000K 5: 5000K	15: 15° 24: 24° 36: 36° 50: 50° 1560: UP15°XDown50°	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance T: 20° tilt to wall DMG: 0-10V Dimming SDMG: Up and down separate dimming RPH: Remote photocell