




LL6123 LED 11W, 11Wx2 15W, 15Wx2 30W, 30Wx2

Applications

Square wall sconces, with both uplight and downlight, or either uplight or downlight, and multiple beam angle choices, to graze columns or to create light level contrast on wall façade. Choices of housing colour allow the luminaire to blend perfectly with exterior architectural colours under daylight.

Dimensions

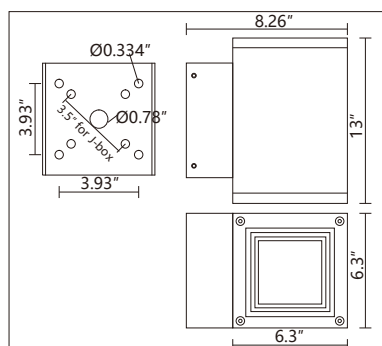



Specifications

Housing and Side Arm	Extruded aluminum
Cover	Die-cast aluminum
Gasket	Silicone rubber
Cover Lens	Tempered Glass
LED Optic	PMMA Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	100~277V/AC
Ambient Temperature	-40°C~45°C
Ingress Protection	IP65

Certifications



Photometric Data

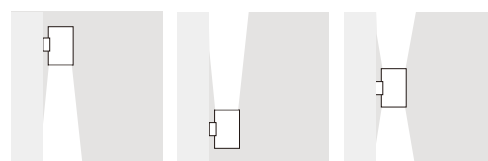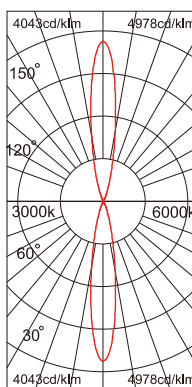

Downlight Only Uplight Only Uplight and Downlight

Ø(m)	h(m)	E(lx) 6000k	E(lx) 3000k
1.88	6	69	48
1.25	4	155	107
0.93	3	276	190
0.62	2	620	428
0.32	1	2478	1709

Ordering Guide:

Example: **ET**¹**6123** - **C22** - **3** - **15** - **G** - **T**⁶

1 Series	2 Power Luminaire Output	3 CCT	4 Beam Angle	5 Housing Colour	6 Accessory
ET6123	C11x2: COB 11W x2 ≤2096lm@3K C11: COB 11W ≤1048lm@3K C15x2: COB 15W x2 ≤2816lm@3K C15: COB 15W ≤1408lm@3K	27: 2700K 3: 3000K 4: 4000K 5: 5000K	15: 15° 24: 24° 36: 36° 50: 50° 1560: UP15°XDown50°	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance T: 20° tilt to wall RPH: Remote photocell
ET6123	C30x2: COB 30Wx2 ≤4984lm@3K C30: COB 30W ≤2492lm@3K	27: 2700K 3: 3000K 4: 4000K 5: 5000K	15: 15° 24: 24° 36: 36° 50: 50° 1560: UP15°XDown50°	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance T: 20° tilt to wall SDMG: Up and down separate dimming DMG: 0-10V Dimming RPH: Remote photocell