




LL6020 LED 24W, 40W

Applications

Round downlights ceiling mounted or pendant mounted to provide under-canopy general lighting. Choices of housing colour allow luminaire to blend perfectly with ceiling/canopy finish.

Dimensions

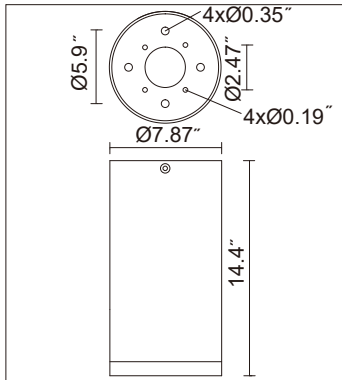

Specifications


Housing	Extruded aluminum
Cover and Side Arm	Die-cast aluminum
Gasket	Silicone rubber
Cover Lens	Tempered Glass
LED Optic	PMMA Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	100~277V/AC_except 24V.DC for RGB
Ambient Temperature	-40°C~45°C
Ingress Protection	IP65

Certifications



Not ETL listed for RGB

Photometric Data



Ø(m)	h(m)	E(lx) 6000k	E(lx) 3000k
1.87	6	126	111
1.25	4	284	250
0.93	3	505	443
0.62	2	1135	999
0.31	1	4536	3993

Ordering Guide:

Example: **ET6020 - C24 - 3 - 25 - G - P**

1 Series-LED Type	2 Power Luminaire Output	3 CCT	4 Beam Angle	5 Housing Colour	6 Accessory
ET6020: High Power LED	C24: LED 24W ≤1453lm@3K	27: 2700K 3: 3000K 4: 4000K R: Red G: Green B: Blue RGB: R.G.B	10: 10° 25: 25° 38: 38° 45: 45° 60: 60°	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance PC: Pendant mount 3' cable PR: Pendant mount 3' rod DMG: 0-10V Dimming MT: Mounting plate for standard junction box RPH: Remote photocell
ET6020: COB LED	C40: COB 40W ≤3658lm@3K	27: 2700K 3: 3000K 4: 4000K 5: 5000K	15: 15° 24: 24° 36: 36° 50: 50°	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance PC: Pendant mount 3' cable PR: Pendant mount 3' rod DMG: 0-10V Dimming MT: Mounting plate for standard junction box RPH: Remote photocell