




LL6162 LED 4W, 15W

Applications

Square downlights ceiling mounted or pendant mounted to provide under-canopy general lighting. Choices of housing colour allow luminaire to blend perfectly with ceiling/canopy finish.

Dimensions

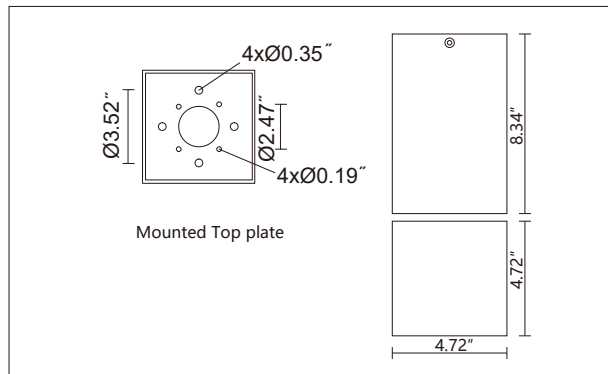


Specifications

Housing	Extruded aluminum
Cover and Side Arm	Die-cast aluminum
Gasket	Silicone rubber
Cover Lens	Tempered Glass
LED Optic	PMMA Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	100~277V/AC
Ambient Temperature	-40°C~45°C
Ingress Protection	IP65

Certifications



Photometric Data



Ø(m)	h(m)	E(k) 6000k	E(k) 3000k
1.86	6	22	17
1.24	4	48	39
0.93	3	86	69
0.62	2	192	154
0.31	1	769	600

Ordering Guide:

Example: **ET6162 - C4 - 3 - 15 - G - P**

1 Series	2 Power Luminaire Output	3 CCT	4 Beam angle	5 Housing Colour	6 Accessory
ET6162	C4: COB 4W ≤332lm@3K	27: 2700K 3: 3000K 4: 4000K 5: 5000K	15: 15° 23: 23° 45: 45° 60: 60°	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance PC: Pendant mount 3' cable PR: Pendant mount 3' rod MT: Mounting plate for standard junction box RPH: Remote photocell
ET6162	C15: COB 15W ≤1048lm@3K	27: 2700K 3: 3000K 4: 4000K 5: 5000K	15: 15° 20: 20° 30: 30° 60: 60°	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance PC: Pendant mount 3' cable PR: Pendant mount 3' rod DMG: 0-10V Dimming MT: Mounting plate for standard junction box RPH: Remote photocell