



Specifications

Housing	Die-cast aluminum
Louver	Die-cast aluminum
Cover Frame	Die-cast aluminum
Gasket	Silicone rubber
Cover Lens	Tempered diffusing glass
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	120~277V/AC
Ambient Temperature	-40°C~45°C
Beam Angle	90° Diffuse / Asymmetric(Louver)
Ingress Protection	IP65

Certifications




LL2301 LED 10W, 20W 12"


Applications

Compact and inconspicuous steplights with two types of faceplates for illumination of pathways and indoor and outdoor stairs.

Dimensions

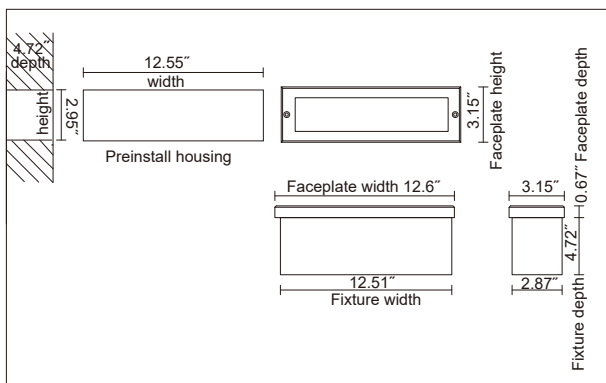

Photometric Data



Ordering Guide:

Example: **ET2301 - S10 - 3- D - G - DMG**

1 Series	2 Power Luminaire Output	3 CCT	4 Faceplate	5 Faceplate Colour	6 Accessory
ET2301	S10: SMD LED 10W ≤160lm@3K S20: SMD LED 20W ≤344lm@3K	27: 2700K 3: 3000K 4: 4000K R: Red G: Green B: Blue	D: Diffuse L: Louver	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance DMG: 0-10V Dimming