

LL2155 LED 8W

Applications

Compact and inconspicuous steplights directing light downward, minimizing uplight while revealing the texture of the stepped baffle.


Specifications

Housing	Die-cast aluminum
Baffle Faceplate	Die-cast aluminum
Gasket	Silicone rubber
Concealed Lens	Tempered glass
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	120~277V/AC
Ambient Temperature	-40°C~45°C
Beam Angle	Asymmetric
Ingress Protection	IP65


Certifications



Dimensions

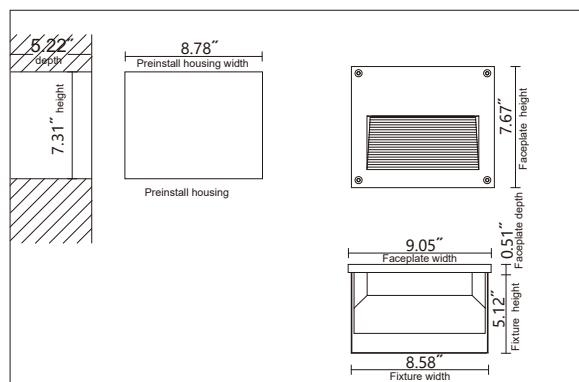

Photometric Data



Ordering Guide:

Example: ET2155 - C8 - 3 - G - DMG

1 Series	2 Power Luminaire Output	3 CCT	4 Faceplate Colour	5 Accessory
ET2155	C8: LED 8W ≤476lm@3K	27: 2700K 3: 3000K 4: 4000K 5: 5000K	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance DMG: 0-10V Dimming