



Specifications

Housing	Die-cast aluminum
Baffle Faceplate	Die-cast aluminum
Gasket	Silicone rubber
Concealed Lens	Tempered Glass
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	120~277V/AC
Ambient Temperature	-40°C~45°C
Beam Angle	Asymmetric
Ingress Protection	IP65

Certifications




LL2165 LED 16W


Applications

Compact and inconspicuous steplights directing light downward, minimizing uplight while revealing the texture of the stepped baffle.

Dimensions

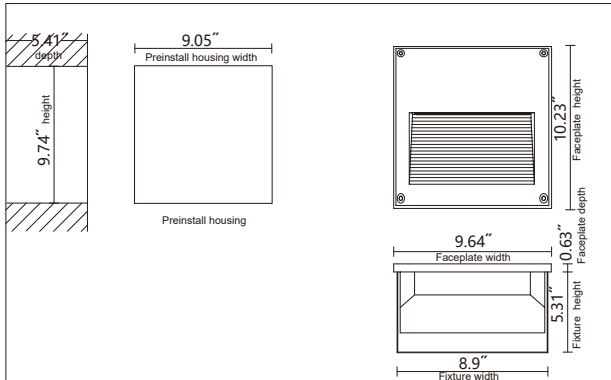

Photometric Data



Ordering Guide:

Example: ET2165 - C16 - 3 - G - DMG

1 Series	2 Power Luminaire Output	3 CCT	4 Faceplate Colour	5 Accessory
ET2165	C16: LED 16W ≤1384lm@3K	27: 2700K 3: 3000K 4: 4000K 5: 5000K	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance DMG: 0-10V Dimming