



LL2001 LED 4W


Applications

Low voltage surface mounted step light with smooth baffle, elegant and discreet, ideally suited for illuminating pathways and architectural surface perimeters.


Specifications

Housing	Die-cast aluminum
Baffle Faceplate	Die-cast aluminum
Gasket	Silicone rubber
LED Optic	Tempered Glass
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	24V/DC
Ambient Temperature	-40°C~45°C
Beam Angle	Asymmetric
Ingress Protection	IP65
Certifications	Not ETL Listed

Dimensions

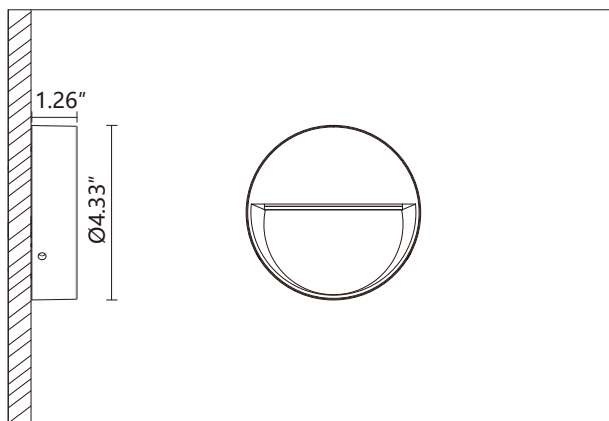

Photometric Data

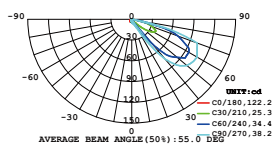

Ordering Guide:

Example: **ET2001 - C4 - 4 - B - M**

1 Series	2 Power Luminaire Output	3 CCT	4 Housing Color	5 Accessory
ET2001	C4: LED 4W ≤102lm@3K	27: 2700K 3: 3000K 4: 4000K	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance