



SM



ST

Specifications


Housing	Die-cast aluminum
Baffle Faceplate	Die-cast aluminum
Gasket	Silicone rubber
LED Optic	Tempered Glass
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	24V/DC
Ambient Temperature	-40°C~45°C
Beam Angle	Asymmetric
Ingress Protection	IP65
Certifications	Not ETL Listed

LL2002 LED 4W


Applications

Low voltage surface mounted step light with choices of smooth and stepped baffles, elegant and discreet, ideally suited for illuminating pathways and architectural surface perimeters.

Dimensions

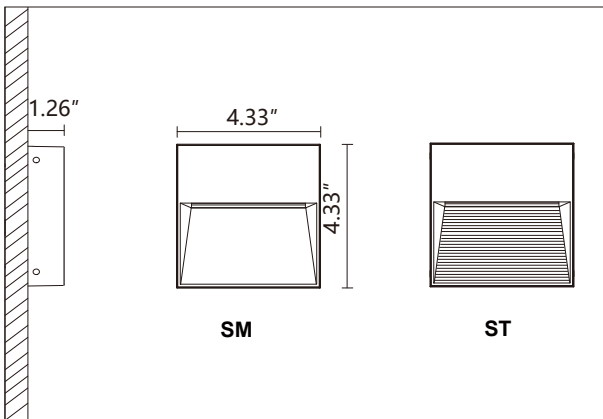

Photometric Data



Ordering Guide:

Example: **ET2002 - C4 - 4 - ST - B - M**

1 Series	2 Power Luminaire Output	3 CCT	4 Baffle	5 Faceplate colour	6 Accessory
ET2002	C4: LED 4W ≤102lm@3K	27: 2700K 3: 3000K 4: 4000K	SM: Smooth ST: Stepped	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance