

SM

ST

LL2004 LED 12W

Applications

Surface mounted step light with choices of smooth and stepped baffles, elegant and discreet, ideally suited for illuminating pathways and architectural surface perimeters.


Specifications

Housing	Die-cast aluminum
Baffle Faceplate	Die-cast aluminum
Gasket	Silicone rubber
LED Optic	Tempered Glass
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	120~277V/AC
Ambient Temperature	-40°C~45°C
Beam Angle	Asymmetric
Ingress Protection	IP65


Certifications



Dimensions

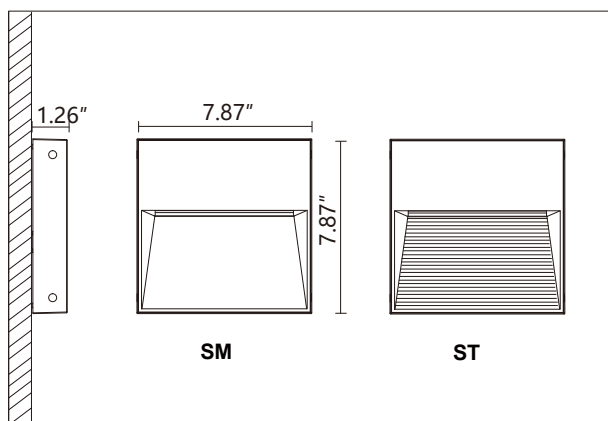

Photometric Data



Ordering Guide:

Example: **ET** ¹**2004** - ²**C12** - ³**4** - ⁴**ST** - ⁵**B**

1 Series	2 Power Luminaire Output	3 CCT	4 Baffle	5 Faceplate colour	6 Accessory
ET2004	C12:LED 12W ≤330lm@3K	27: 2700K 3: 3000K 4: 4000K	SM: Smooth ST: Stepped	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance DMG: 0-10V Dimming