



LL5023 LED 10W

Applications

LED bollard featuring a sleek appearance of extruded aluminium column with choices of height and surface finish and creating an axially symmetric, broad and uniform beam spread, ideally suited for illumination of walkways, entrances and access roads.


Specifications

Housing body	Extruded aluminum
Housing Top	Die-cast aluminum
Gasket	Silicone rubber
LED Optic	Polycarbonate Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	100~240V/AC
Ambient Temperature	-20°C~45°C
Light Aperture	360° Tempered glass
Ingress Protection	IP65

Certifications




Dimensions

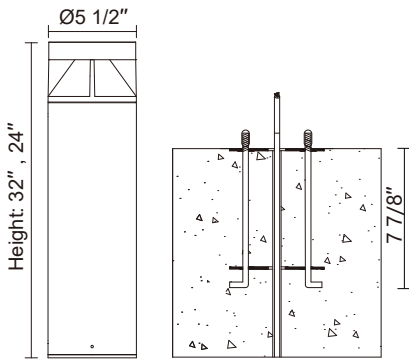

Four anchor bolts included (standard)

Photometric Data



Ordering Guide:

Example: **ET5023 - C10-24-6 - 4 - B - DMG**

1 Series	2 Power-Height-Diameter Luminaire Output	3 CCT	4 Housing Color	5 Accessory
ET5023	C10-24-6: LED 10W-24"-5 1/2"	27: 2700K	B: Black RAL9011	M : Marine ambient corrosion resistance
	C10-32-6: LED 10W-32"-5 1/2"	3: 3000K	W: White RAL9016	
	≤242lm@3K	4: 4000K	G: Gray RAL7012	
		5: 5000K	Z: Mineral bronze	
			S: Silver RAL9006	