



LL5035 LED 6W

Applications

LED bollard featuring a sleek appearance of extruded aluminium column with choices of height and surface finish. The 180° light aperture is ideally suited for illumination of walkways, entrances and access roads where light cutoff is required on either side of the passage.


Specifications

| | |
|---------------------|--------------------------|
| Housing body | Extruded aluminum |
| Housing Top | Die-cast aluminum |
| Gasket | Silicone rubber |
| LED Optic | Polycarbonate Lens |
| Surface Finish | AkzoNobel powder coating |
| Driver Type | Constant current |
| LED CRI | 80 |
| Input Voltage | 100~240V/AC |
| Ambient Temperature | -20°C~45°C |
| Light Aperture | 180° Tempered glass |
| Ingress Protection | IP65 |


Certifications



Dimensions

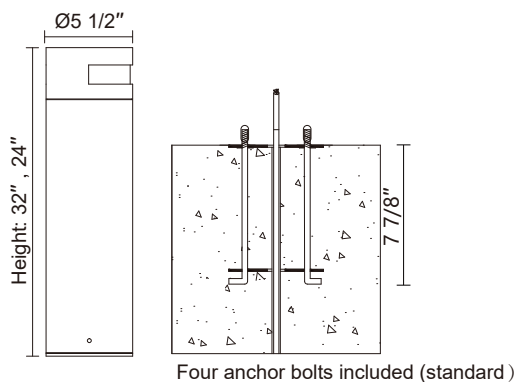

Photometric Data



Ordering Guide:

Example: **ET5035 - C6-24-6 - 4 - B - M**

| 1 Series | 2 Power-Height-Diameter Luminaire Output | 3 CCT | 4 Housing Color | 5 Accessory |
|-------------|---|---|---|--|
| ET5035 | C6-24-6: LED 6W-24"-5 1/2" C6-32-6: LED 6W-32"-5 1/2" ≤366lm@3K | 27: 2700K 3: 3000K 4: 4000K 5: 5000K | B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006 | M: Marine ambient corrosion resistance |