









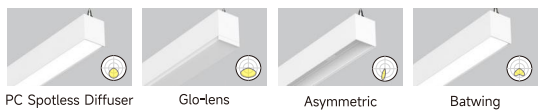

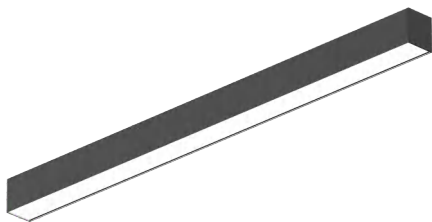







ARC 2.75"



MAIN FEATURES

- Sleek architectural design and quality.
- 2.75" linear aperture.
- Available in 2', 3', 4', 6', 8' lengths for individual or continuous runs.
- High light efficacy 115-130lm/w.
- Multiple installation types including suspended, recessed, surface, and wall.
- CCT Switchable from 3000K, 3500K, 4000K.
- Up and down lighting with flexible intensity adjustment.
- Highly customizable with X, Y, T etc Joints.
- Integrated sensor system for smart control.
- Emergency battery backup available.
- Easy replacement and maintenance with removable accessories.

Input Wattage 20W 30W 40W 60W 80W 2FT 3FT 4FT 6FT 8FT	Delivered Lumens 2300lm-9200lm
Input Voltage 120V-347V input, 50-60Hz	Light Color Static White: 3000K, 3500K, 4000K
Dimming Control On-off, 0-10V, Triac, DALI	Color Quality CRI 80+, SDCM≤5
Mounting Options <div><div> Surface</div><div> Pendant</div><div> Wall</div><div> Recessed</div><div> T-bar</div></div>	Optics lens <div><div> PC Spotless Diffuser</div><div> Glo-lens</div><div> Asymmetric</div><div> Batwing</div></div>
Size L: 2FT / 3FT / 4FT / 6FT / 8FT (606/906/1206/1806/2406mm) W: 2.75inch (70mm) H: 3.15inch (80mm)	Lighting Types <div><div> Downlight</div><div> Up/Downlight</div></div>
Finishes <div><div> White</div><div> Black</div><div><div></div>Custom Color</div></div>	Optical Accessories <div><div> PC Louver</div><div> Hex louver</div></div>
Warranty 5 year limited warranty	Lumen Maintenance 50000h@80%(L80)