


ATRO 1"

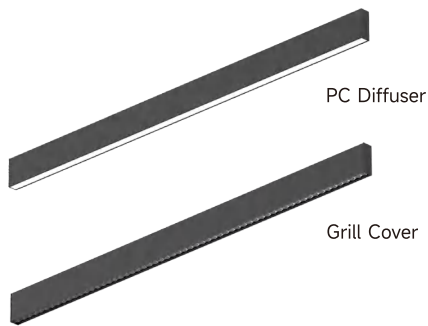

MAIN FEATURES

- Ultra narrow 1" width.
- Diffused optical cover / Grille cover available.
- High light efficacy 110lm/w(Grill Cover).
- UGR<10(Grill Cover) For visual comfort.
- Easy to connect multiple fixtures for scalable continuous run.
- Quick and easy installation with adjustable suspension wire spacing.

Input Wattage 25W 30W 50W 3.15FT 3.94FT 5.91FT	Delivered Lumens 1800lm-3600lm(PC Diffuser), 3300lm-4950lm(Grill Cover)
Input Voltage 220-240V / 120V-277V input, 50-60Hz	Light Color Static White: 2700K, 3000K, 3500K, 4000K, 5000K
Dimming Control On-off, 0/1-10V, DALI	Color Quality CRI 80+, SDCM≤5
Mounting Options  Pendant	Beam Optics Grille Cover:  20°, 40° Spot  60° Flood  20°x20° Rectangular PC Diffuser:  100° Wide flood
Size L: 3.15FT / 3.94FT / 5.91FT (960/1200/1800mm) W: 1inch (26mm) H: 3inch (77mm)	Lighting Types  Downlight
Finishes  White  Black  Custom Color	Optical Accessories None
Warranty 5 year limited warranty	Lumen Maintenance 50000h@80%(L80)