



Specifications

Housing body	Extruded aluminum
Housing Top	Die-cast aluminum
Gasket	Silicone rubber
LED Optic	Polycarbonate Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	120~277V/AC
Ambient Temperature	-40°C~45°C
Light Aperture	360° PC
Ingress Protection	IP65

Certifications




LL5021 LED 14W, 21W


Applications

LED bollard featuring a sleek appearance of extruded aluminium column with choices of height and surface finish and creating an axially symmetric, broad and uniform beam spread, ideally suited for illumination of walkways, entrances and access roads.

Dimensions

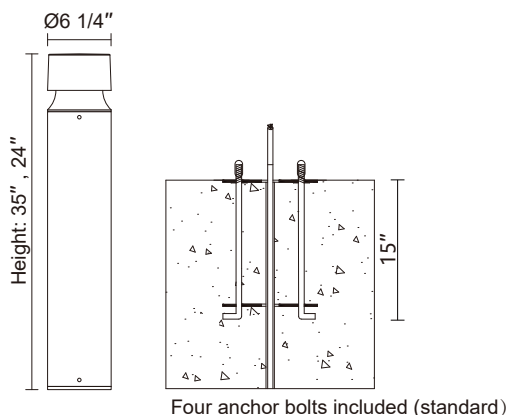

Photometric Data

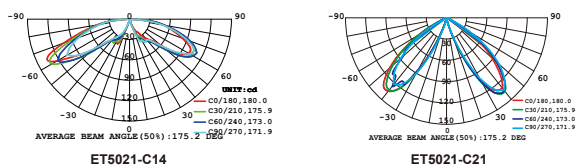

Ordering Guide:

Example: **ET5021 - C14-24-6 - 4 - B - DMG**

1 Series	2 Power-Height-Diameter Luminaire Output	3 CCT	4 Housing Color	5 Accessory
ET5021	C14-24-6: LED 14W-24"-6 1/4" C14-35-6: LED 14W-35"-6 1/4" ≤358lm@3K	27: 2700K 3: 3000K 4: 4000K 5: 5000K	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance DMG: 0-10V Dimming GFCI: GFCI receptacle
	C21-24-6: LED 21W-24"-6 1/4" C21-35-6: LED 21W-35"-6 1/4" ≤554lm@3K			