



## LL5028 LED 20W, 35W

### Applications

LED bollard featuring a sleek appearance of extruded aluminium column with choices of height and surface finish and creating an axially symmetric, broad and uniform beam spread, ideally suited for illumination of walkways, entrances and access roads.


### Specifications

Housing body	Extruded aluminum
Housing Top	Die-cast aluminum
Gasket	Silicone rubber
LED Optic	Polycarbonate Lens
Surface Finish	AkzoNobel powder coating
Driver Type	Constant current
LED CRI	80
Input Voltage	120~277V/AC
Ambient Temperature	-40°C~45°C
Light Aperture	360° Tempered glass
Ingress Protection	IP65


### Certifications



### Dimensions

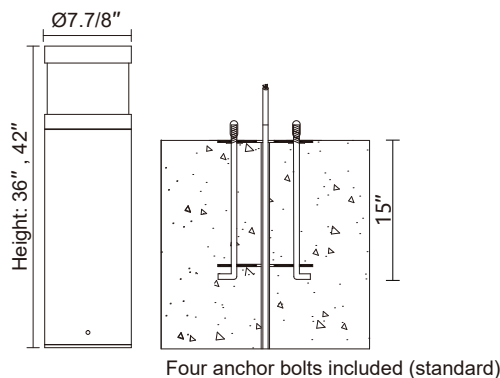

### Photometric Data

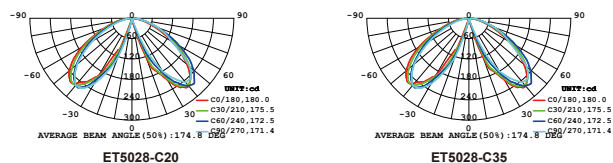

### Ordering Guide:

Example: **ET5028 - C20-36-8 - 4 - B - DMG**

1 Series	2 Power-Height-Diameter Luminaire Output	3 CCT	4 Housing Color	5 Accessory
ET5028	C20-36-8: LED 20W-36"-7 7/8" ≤756lm@3K  C35-36-8: LED 35W-36"-7 7/8" C35-42-8: LED 35W-42"-7 7/8" ≤1002lm@3K	27: 2700K 3: 3000K 4: 4000K 5: 5000K	B: Black RAL9011 W: White RAL9016 G: Gray RAL7012 Z: Mineral bronze S: Silver RAL9006	M: Marine ambient corrosion resistance DMG: 0-10V Dimming (For 20W only ) GFCI: GFCI receptacle